

注释:

1. 材料: 精退火H-K9L光学玻璃 Nd = 1.5168

Material: H-K9L

2. 设计波长: 587.6nm

Design Wavelengths: 587.6nm

3. 焦距: 120.00±2%mm

Focal Length: 120.00±2%mm

4. 后焦距: 116.00mm

Back Focal Length: 116.00mm

5. 定心: <3弧分

Centration: <3 arcmin

6. 镀膜: AR@650~1050nm

Coating: AR@650~1050nm



7. 倒边: 0.2mm×45°

Bevel: 0.2mm×45°

8. 面型精度: $\lambda/4$ @632.8nm

Spherical Surface Irregularity: $\lambda/4$

@632.8nm

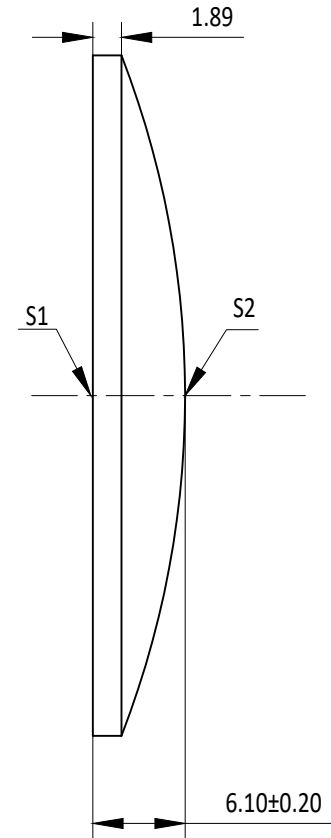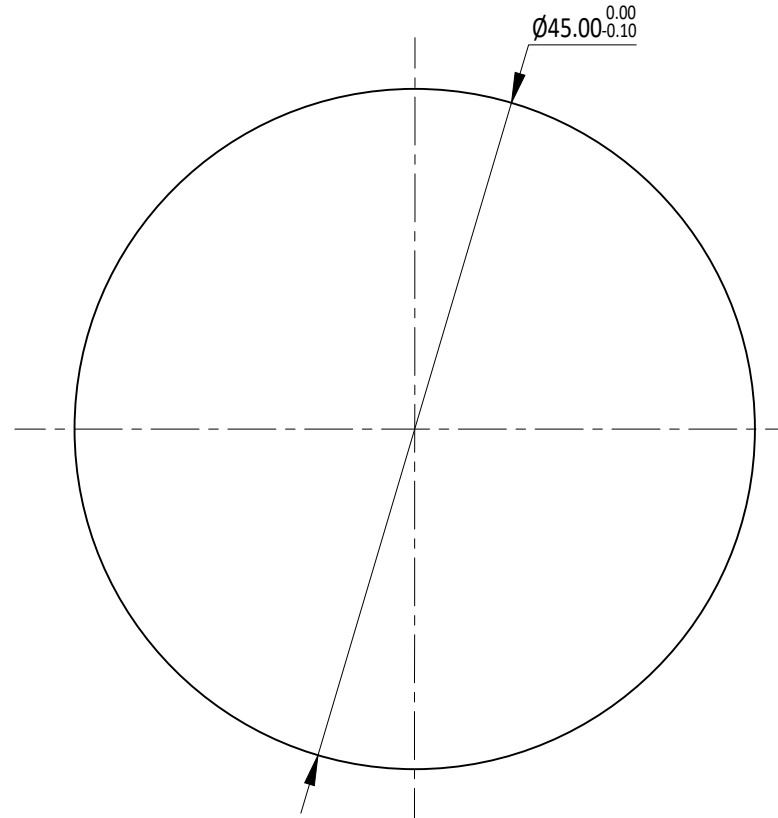

注:

1: 本图仅供参考, 禁止使用本图加工生产.

2: 细节图纸如有更改不再另行通知.

	S1	S2
形状	平面	凸面
曲率半径	无穷	62.20
通光孔径	>90%	>90%
光洁度	40-20	40-20

北京欧普特科技有限公司 BEIJING GOLDEN WAY			
产品型号 Model	GL11-045-120-NIR		
名称 Name	K9平凸透镜 NIR镀膜 D=45.00mm F=120.00mm		
http://www.goldway.com.cn	单位 Dimension Unit: mm	投影	